

FORM


Request for special tools
Solid carbide drill – two-step based on the standard product

Please send the completed form to Techsupport.UK@ceratizit.com!

Company:	Department:
Technical application engineer:	Contact:
Customer no.:	Contact Tel. No.:
Your reference:	Contact E-Mail:

1 Geometry similar CERATIZIT no.

2* Dimensions

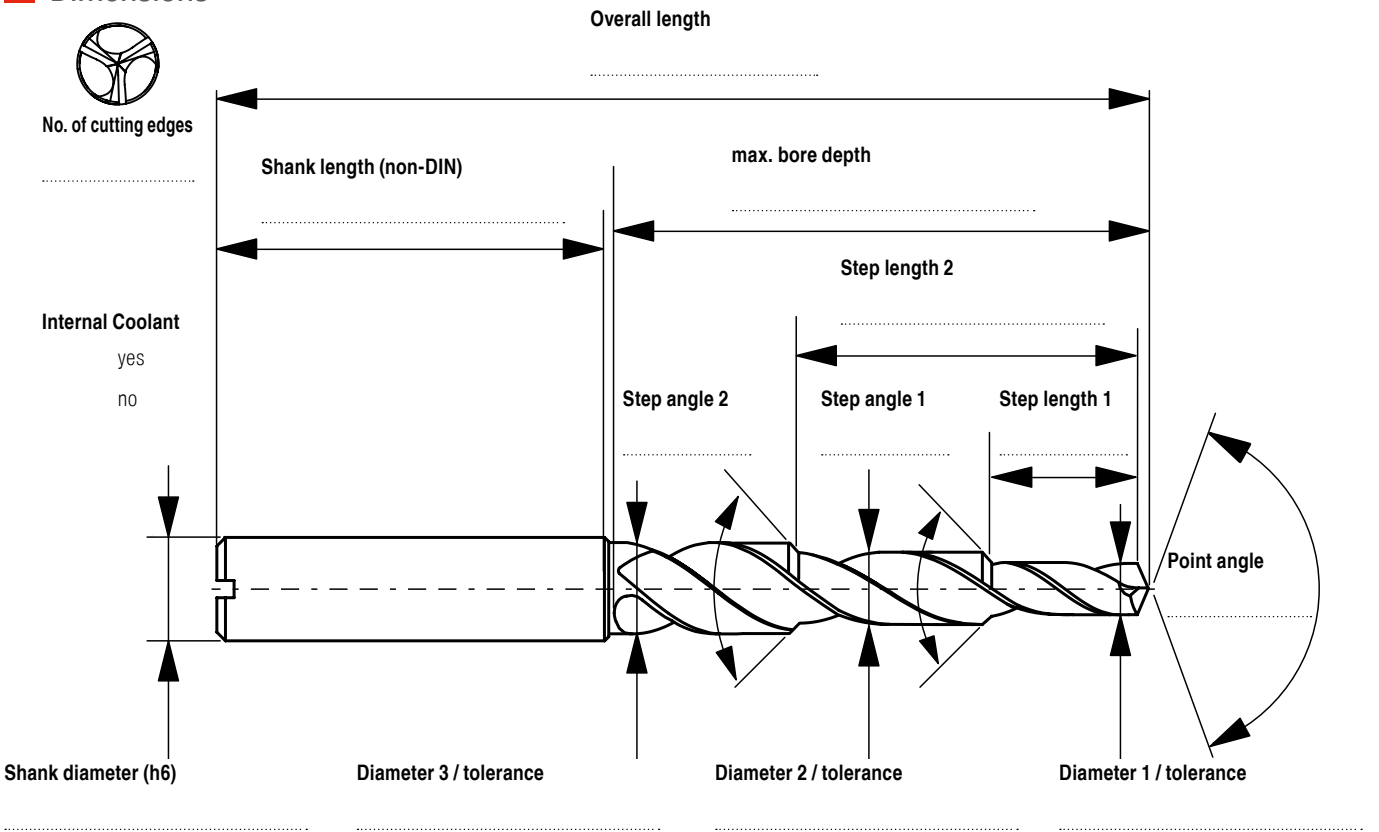

3 Coolant



Emulsion	Oil	Air	without
Minimum quantity lubrication	Coolant pressure	bar

4* Shank Type

			Non-DIN (enter dimensions on drawing)
Plain shank (DIN 6535 HA)	Weldon (DIN 6535 HB)	Whistle notch (DIN 6535 HE)	

* If you have not specified any preferences under Points 2, 4 and 6, we will apply the standard dimensions.

5 Type of machining



Through hole

Blind hole

6* Coating

uncoated
as per reference article

7 Material Specification

Material number

Standard designation

Tensile strength in N/mm²/hardness (HRC, HB, etc.)

.....

8 Comments

9 required number of pieces:

(Minimum order 3 pieces)

..... Piece

* If you have not specified any preferences under Points 2, 4 and 6, we will apply the standard dimensions.